



METALMASTER®





ROOF FOOTBRIDGE

SOLO CLASSICA 480 AND 275
VALC PROFILE

INSTALLATION GUIDE

ROOF FOOTBRIDGE
Solo 480 and 275/VALC profile

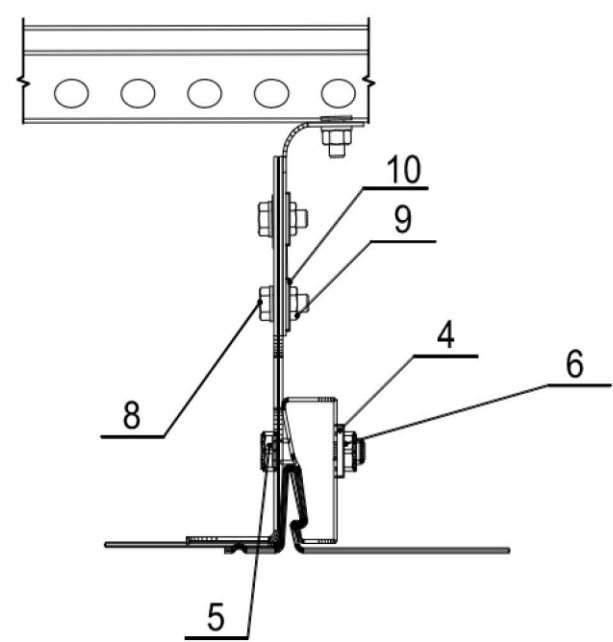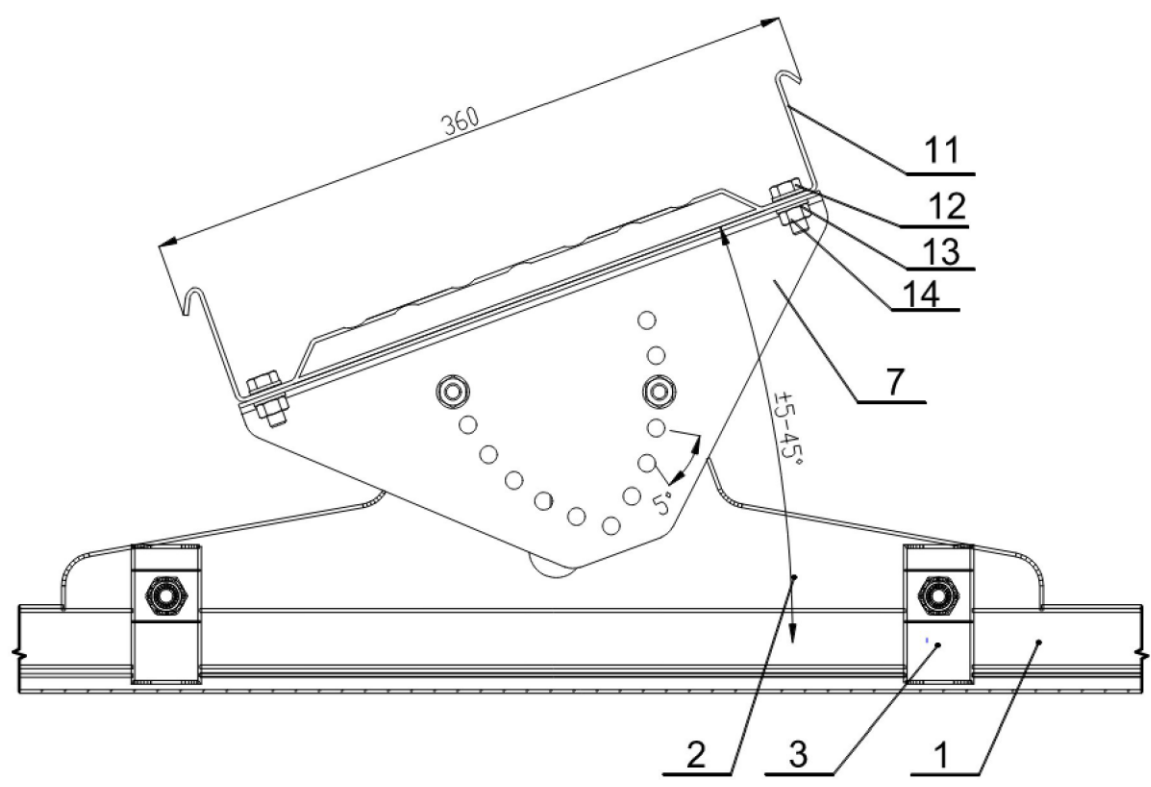

1.12 m roof footbridge installation kit

Position	Name	Quantity
1.	<i>Roof profile</i>	-
2.	<i>RP-bracket plate</i>	3
3.	<i>RP-bracket</i>	6
4.	<i>M8 washer</i>	6
5.	<i>M8x35 screw</i>	6
6.	<i>M8 nut</i>	6
7.	<i>Tilt adjustment plate</i>	3
8.	<i>M8x14 screw</i>	6
9.	<i>M8 nut</i>	6
10.	<i>M8 washer</i>	6
11.	<i>1.12 m platform</i>	1
12.	<i>M10x16 screw</i>	6
13.	<i>M10 nut</i>	6
14.	<i>M10 washer</i>	6

Quantity depends on the number of kits

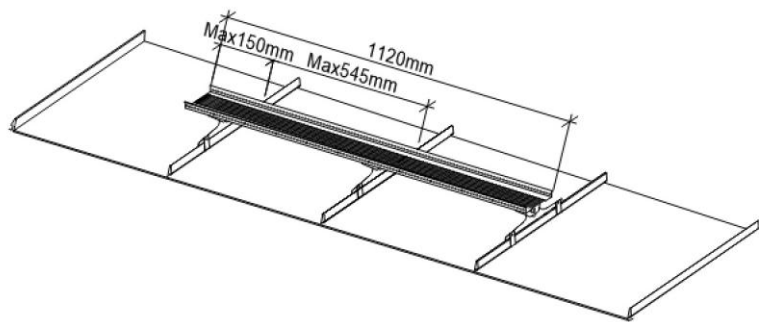


Figure 1.

3 m roof footbridge installation kit

Position	Name	Quantity
1.	<i>Roof profile</i>	-
2.	<i>RP-bracket plate</i>	4
3.	<i>RP-bracket</i>	8
4.	<i>M8 washer</i>	8
5.	<i>M8x35 screw</i>	8
6.	<i>M8 nut</i>	8
7.	<i>Tilt adjustment plate</i>	4
8.	<i>M8x14 screw</i>	8
9.	<i>M8 nut</i>	8
10.	<i>M8 washer</i>	8
11.	<i>3 m platform</i>	1
12.	<i>M10x16 screw</i>	8
13.	<i>M10 nut</i>	8
14.	<i>M10 washer</i>	8

Quantity depends on the number of kits.

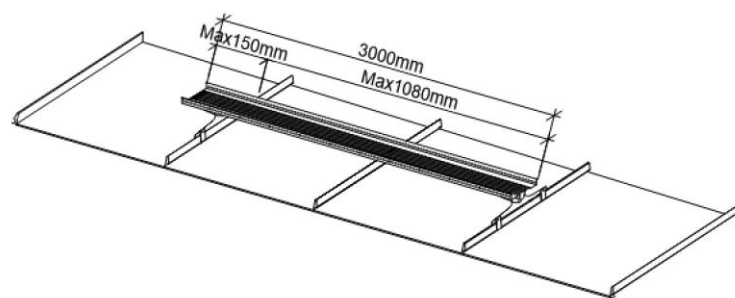


Figure 2.

Application

- A roof footbridge is necessary if the pitch of the roof is greater than 5°.
- A roof footbridge can be installed on roofs with pitches of 5–45°.
- Roof footbridges should be installed for safe movement on the roof.

Safety

- One person, weighing up to 110 kg, may be on a roof footbridge!
- Use safety ties when moving on a roof footbridge!
- In winter, clear snow from the roof footbridge before stepping onto it!

Before installing a roof footbridge:

- Plan the location for installation.
- Make sure that the roof structure is stable.
- It is recommended to install the roof footbridge on top of the roof battens.
- Check to confirm that the roofing is installed according to the roof installation instructions.
- Before installing the supports, mark a straight line in which you plan to install the roof footbridges, e.g., using a coloured chalk line.
- Make sure that the roof footbridge is installed in a straight line.

• **Roof footbridge installation:**

- Install the RP-bracket plate, positioning it on one side of the roof seam such that the RP-bracket plate is in a vertical position (Figure 2).
- Place the RP-bracket on the other side of the seam (Figure 2).
- Each RP-bracket plate must be fastened together with the RP-bracket (Figure 2).
- Make sure that the RP-bracket parts are in the position shown in the figure (Figure 3).
- Screw together using an M8x35 mm bolt screw, M8 nut, and washer (Figure 2).
- Tighten the screws such that the RP-bracket plate holds firmly on the roof material (Figure 2).
- Attach the tilt adjustment plate to the RP-bracket plate using 2 M8x14 screws with a nut (Figure 2).
- Attach the roof footbridge to the tilt adjustment plate using 2 M10x16 screws with a nut and washer. The maximum distance between RP-bracket plates and platform ends is 150 mm (Figure 1).
- A roof footbridge can be easily extended by inserting one into the other.

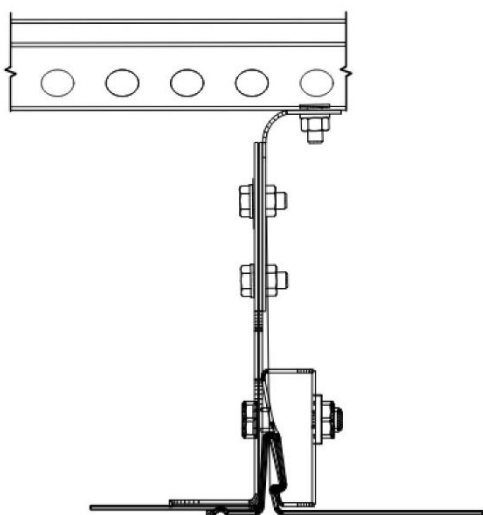


Figure 3.

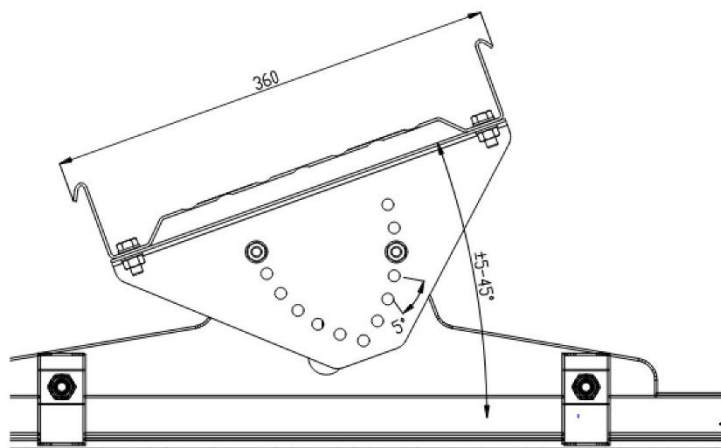


Figure 4.